
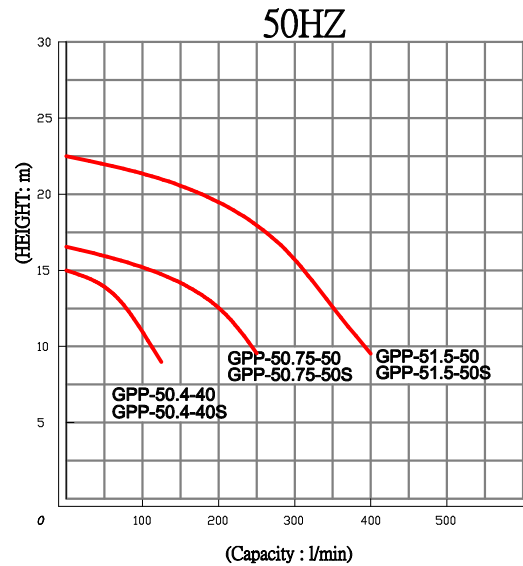


PERFORMANCE CURVE

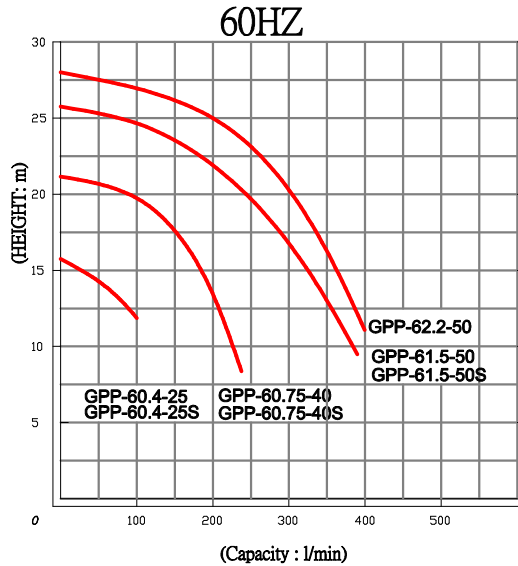

SPECIFICATIONS

TYPE	MOTOR				Pump				Pump (kg)	Remark
					SIDCH.DIA		HEAD	CAPACITY		
	HP(KW)	PHASE	Hz	POLE	mm	in	m	l/min		
GPP-60.4-25	0.5/0.4	3	60	2	25	1	12	82	13.7	Union
GPP-60.75-40	1/0.75	3	60	2	40	1.5	15	185	17	Union
GPP-61.5-50	2/1.5	3	60	2	50	2	17	280	28	Flange
GPP-62.2-50	3/2.2	3	60	2	50	2	20	300	32	Flange
GPP-60.4-25S	0.5/0.4	1	60	2	25	1	12	82	13.7	Union
GPP-60.75-40S	1/0.75	1	60	2	40	1.5	15	185	17	Union
GPP-61.5-50S	2/1.5	1	60	2	50	2	17	280	28	Flange
GPP-50.4-40	0.5/0.4	3	50	2	40	1.5	12	81	13.7	Union
GPP-50.75-50	1/0.75	3	50	2	50	2	13.5	130	17	Flange
GPP-51.5-50	2/1.5	3	50	2	50	2	16.5	285	28	Flange
GPP-50.4-40S	0.5/0.4	1	50	2	40	1.5	12	81	13.7	Union
GPP-50.75-50S	1/0.75	1	50	2	50	2	13.5	130	17	Flange
GPP-51.5-50S	2/1.5	1	50	2	50	2	16.5	285	28	Flange

We reserve the right to change the content without notice.

